
SAFE WORK PRACTICE

| TITLE | Grating Material |
|-----------------------|---|
| GENERAL | Protecting workers from injuries associated with removal of grating floors or sections of floors |
| APPLICATION | Removal of partial or whole grating floors is an integral part of |
| | maintenance of equipment |
| PROTECTIVE | Permit system |
| MECHANISMS | PPE |
| | Barricades (see photo) Safe |
| | work procedure |
| | ERP (Emergency Response Plan) |
| SELECTION | As per safe work procedure |
| AND USE | |
| SUPERVISOR | To facilitate and/or provide proper instruction to their workers on |
| RESPONSIBILITY | protection requirements and training |
| | Hazard assessment |
| | Worksite inspection |
| WORKER | 1. Ensure you are conversant with safe work procedures |
| RESPONSIBILITY | 2. Install barricades IMMEDIATELY after any removal of grating |
| | 3. Ribbon off hazardous area |
| * The information pre | sented in this publication is intended for general use and may not apply to every |
| | t a definitive guide to government regulations and does not relieve persons using this responsibilities under applicable legislation. |

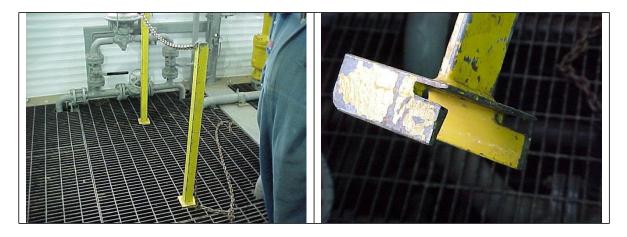

With the channel iron cut in the method shown in the picture it can be slipped into the grating and locks solidly in place. The chain slips onto hooks to allow for various distance between posts.